X(CO₂) at P = 4000 bars

Fig. 2.

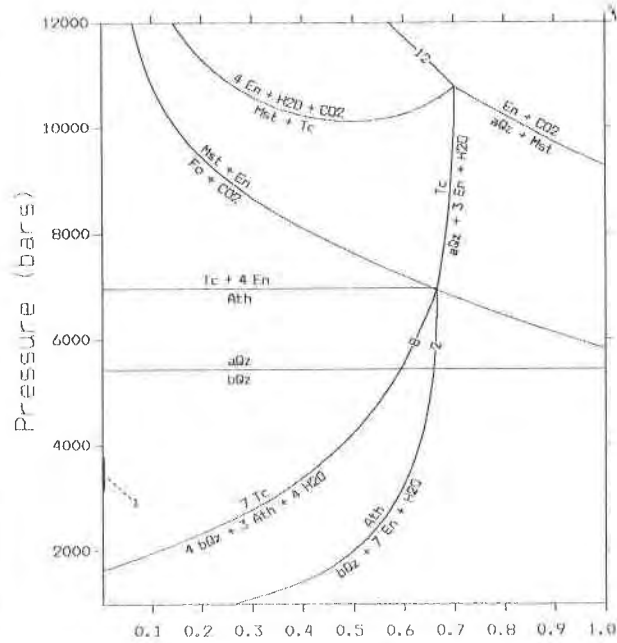
X(CO₂) at T = 700 (C)

Fig. 3.

TABLE 1. Execution times in minutes for PTX

Fig. no.	No. of reactions	Compaq 286 (AT)	Compaq Plus (XT)
1	35	1.0	1.2
2	36	22.1	25.2
3	126	23.1	21.1

polymorphic transitions, and several specific solid solutions. Options for a variety of other equations of state are provided so that PTX can be used with different sets of thermodynamic data.

PLOT/S/H

These programs are used for viewing the calculated stable phase diagrams on a video monitor. The different versions of PLOT can be used with an IBM color graphics card (CGA), enhanced graphics adapter (EGA), or Hercules graphics card.

PRINTER

This program makes high-resolution hard copies of phase diagrams on dot matrix printers. Figures 1 to 3 show examples of phase diagrams printed on an EPSON dot matrix printer.

CLEAN

This program cleans up the appearance of complicated phase diagrams on which the reaction labels overwrite one another. It replaces all conflicting reaction labels with numbers and writes a list of reactions that correspond to these numbers to a separate file. The CLEANED up plot output (Figs. 2 and 3) can be viewed on screen with PLOT, or on a hard copy with PRINTER.

REFERENCES

- Berman, R.G., Brown, T.H., and Greenwood, H.J. (1985) An internally consistent thermodynamic data base for minerals in the system Na₂O-K₂O-CaO-MgO-FeO-Fe₂O₃-Al₂O₃-SiO₂-TiO₂-H₂O-CO₂. Atomic Energy of Canada, Ltd. Technical Report 377, 62 p. (available from SSDO, Atomic Energy of Canada, Ltd., Chalk River, Ontario, K0J 1J0 Canada).
- Berman, R.G., Engi, M., Greenwood, H.J., and Brown, T.H. (1986) Derivation of internally consistent thermodynamic data by the technique of mathematical programming: A review with application to the system MgO-SiO₂-H₂O. *Journal of Petrology*, 27, 1331-1364.
- Perkins, E.H., Brown, T.H. and Berman, R.G. (1986) PTX-SYSTEM: Three programs for calculation of pressure-temperature-composition phase diagrams. *Computers & Geosciences*, 12, 749-755.

NOTICE

NEW TEMPERATURE STANDARD

The U.S. National Bureau of Standards has issued a new standard reference material for temperature based on the freezing point of pure indium. The indium freezing-point standard (SRM 1971) supplies a fixed point for temperature calibrations at 156.635 ± 0.002 °C on the IPTS-68. This temperature lies between the two temperature reference points for the freezing points of gallium (30 °C) and tin (232 °C) and so provides an important new point for precision thermometry and temperature control.